



NSH156PQ 15A, 600V Half-Bridge IPM

1. Features


- Under-voltage lockout for both channels
- High-level effective, supported 3.3V, 5V and 15V input
- Integrated gate drivers and bootstrap functionality
- Temperature detected output for MCU control
- Cross-conduction prevention logic
- Isolation 1500 VRMS min
- 600V maximum operating voltage
- 240mΩ Rdson@25℃
- High-Side Under-Voltage Protection
 - Trigger level=8.2V
 - Reset level= 8.9V

2. Applications

- BLDC Motor control

3. Description

NSH156PQ is a 15A, 600V half-bridge intelligence power module designed for motor drive applications, integrated 15A/600V MOSFET gate driver and bootstrap functionality in a small PQFN 5×6mm package. It can be flexibly applied to single-phase and three-phase DC brushless motor drive.

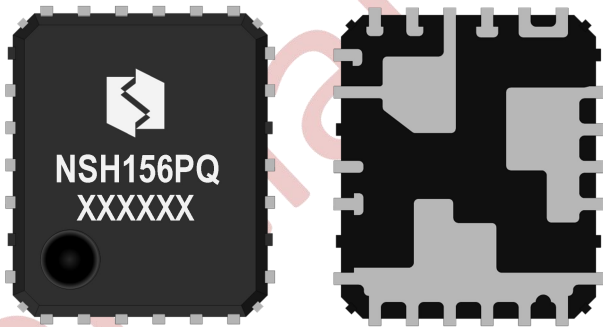

Device Information

Part Number	Package	Body size
NSH156PQ	PQFN5x6	5mm x 6mm

Internal Electrical Schematic

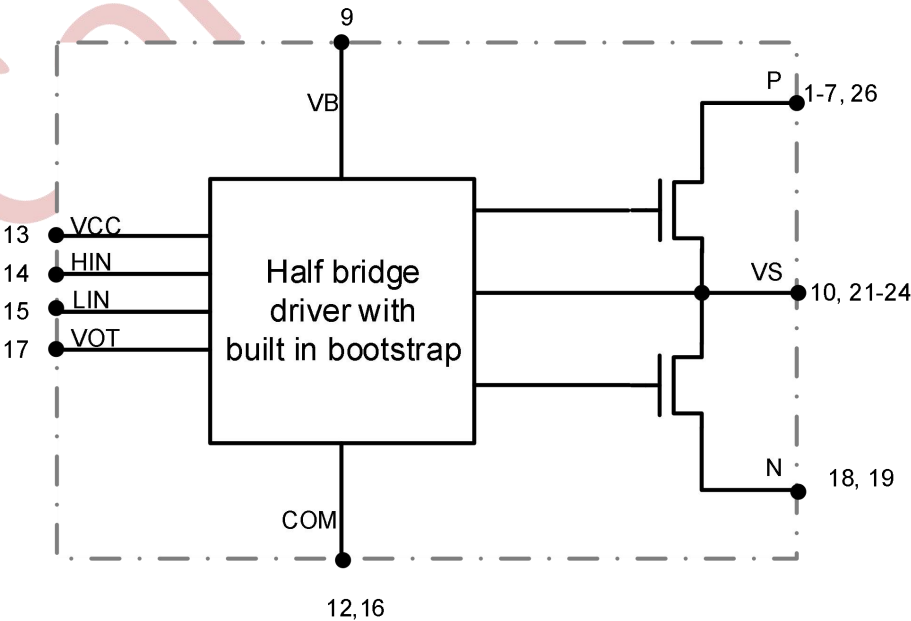


Fig.1 Internal Electrical Schematic

4. Selection Guide

PART No.	Input signal	Deadtime	UVLO	Built in BSD	BV _{DSS}	R _{DS(on)}
NSH156PQ	HIN, LIN	540ns	8.2/8.9V	YES	600V	240mΩ

5. Order Information

PART No.	Marking	Package Type	packing of products	SPQ
NSH156PQ	 NSH156PQ XXXXXX	PQFN5x6	Tape and reel	5 K

6. Revision History

Version	Items	Time
V1.0	Created	2022.04.01
V1.1	Advanced EMI performance	2023.05.29



目录

1. FEATURES	1
2. APPLICATIONS	1
3. DESCRIPTION	1
4. SELECTION GUIDE	2
5. ORDER INFORMATION	2
6. REVISION HISTORY	2
7. PIN-OUT DESCRIPTION	4
8. ABSOLUTE MAXIMUM RATINGS	5
8.1 INVERTER PART	5
8.2 CONTROL PART	5
8.3 BOOTSTRAP FUNCTIONALITY	5
8.4 TOTAL SYSTEM	5
8.5 THERMAL AND MECHANICAL CHARACTERISTICS	5
9. RECOMMENDED OPERATING CONDITIONS	6
10. ELECTRICAL CHARACTERISTICS	7
10.1 CONVERT PART	7
10.2 CONTROL PART	7
11. FUNCTION DESCRIPTION	8
11.1 BASIC FUNCTION DESCRIPTION	8
11.2 TIME CHARTS OF PROTECTIVE FUNCTION	9
12. NSH156PQ TYPICAL APPLICATION CIRCUIT	10
13. DETAILED PACKAGE OUTLINE DRAWING	11
14. DISCLAIMER	12

7. Pin-Out Description

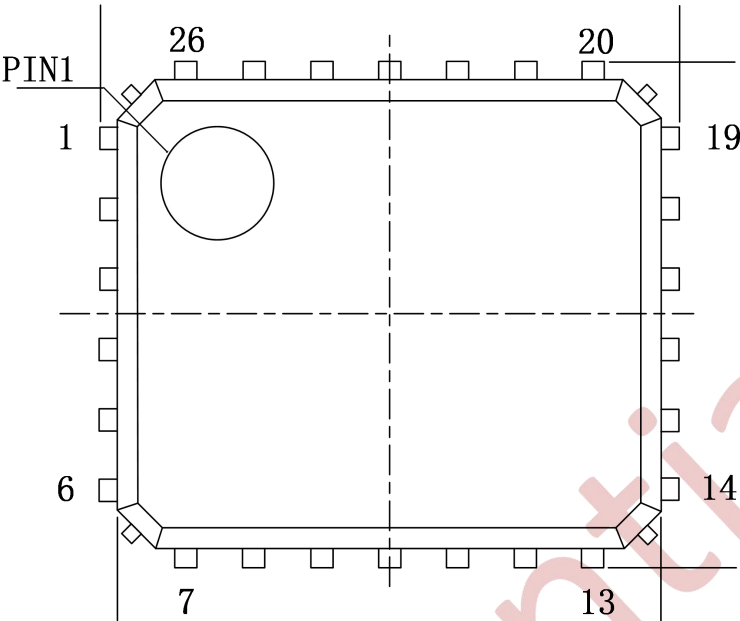


Fig2 Footprint Description

Table7-1 Pin description

PIN	Name	Description
13	VCC	Gate Drive Supply
14	HIN	Logic Input for High Side
15	LIN	Logic Input for Low Side
17	VOT	Temperature Signal Out
12、16	COM	Low Side Gate Drive Return
18、19	N	Low Side Source Connection
10、21-24	VS	Phase Output
1-7、26	P	DC Bus
9	VB	High Side Floating Supply (Bootstrap Cap Connection)

8. Absolute Maximum Ratings

T_j = 25°C, Unless Otherwise Specified

8.1 Inverter Part

Symbol	Parameter	Conditions	Ratings	Unit
V _{DSS}	Drain-Source Voltage of MOSFET	T _c = 25°C	650	V
I _c	MOSFET Current, Continuous	T _c = 25°C (T _c refer to Fig:5)	7	A
I _p	MOSFET Current, pulse	T _c = 25°C	15	A
P _D	Maximum Power Dissipation	T _c = 100°C, For MOSFET	40	W

8.2 Control Part

Symbol	Parameter	Conditions	Ratings	Unit
V _{CC}	Control Supply Voltage	Applied between V _{CC} and COM	20	V
V _{BS}	High-side Bias Voltage	Applied between V _B and V _S	20	V
V _{IN}	Input Signal Voltage	Applied between V _{IN} and COM	-0.3~V _{CC} +0.3	V

8.3 Bootstrap Functionality

Symbol	Description	Conditions	Rating	Unit
V _{RRMB}	Maximum Repetitive Reverse Voltage	T _c = 25°C	600	V
I _{FB}	Forward Current	T _c = 25°C	0.25	A
I _{FPB}	Forward Peak Current, Peak	T _c = 25°C, Less than 1ms	0.5	A

8.4 Total System

Symbol	Parameter	Conditions	Ratings	Unit
T _j	Operating Junction Temperature		-40~150	°C
T _{STG}	Storage Temperature	T _c = 25°C	-40~125	°C
V _{ISO}	Isolation Voltage	60Hz, Sinusoidal, AC 1 min, between pins and heat-sink plate	1500	V _{rms}

NOTE1: To insure safe operation of the IPM, the average junction temperature should be limited to T_J ≤ 150°C (@T_c ≤ 100°C).

8.5 Thermal and Mechanical Characteristics

Symbol	Parameter	Conditions	Ratings	Unit
R _{th} (J-B)	Thermal resistance, junction to mounting pad, each MOSFET	For Each MOSFET	1.2	°C/W
R _{th} (J-A)	Thermal resistance, junction to ambient, each MOSFET	For Each MOSFET	40	°C/W

9. Recommended Operating Conditions

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
V_{PN}	Supply Voltage	Applied between P and N	-	300	450	V
V_{CC}	Control Supply Voltage	Applied between VCC and COM	13.5	15.0	16.5	V
V_{BS}	High-Side Bias Voltage	Applied between VB and VS	13.5	15.0	16.5	V
$V_{IN(ON)}$	Input ON Threshold Voltage	Applied between VIN and COM	3.0	-	V_{CC}	V
$V_{IN(OFF)}$	Input OFF Threshold Voltage		0	-	0.6	V
t_{dead}	Blanking Time for Preventing Arm-Short	$V_{CC} = V_{BS} = 13.5 \sim 16.5 \text{ V}$, $T_j < 150^\circ\text{C}$	1.0	-	-	us
F_{PWM}	PWM Switching Frequency	$T_j < 150^\circ\text{C}$	-	15	20	kHz



10. Electrical Characteristics

T_J = 25°C, Unless Otherwise Specified

10.1 Convert Part

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
BV _{DSS}	Drain - Source Breakdown Voltage	V _{IN} = 0 V, I _D = 1mA (NOTE 2)	650	-	-	V
I _{DSS}	Zero Gate Voltage Drain Current	V _{IN} = 0 V, V _{DS} = 600 V	-	-	1	mA
V _{SD}	Drain - Source Diode Forward Voltage	V _{CC} = V _{BS} = 15V, V _{IN} = 0 V, I _D = -4 A	-	4.2	-	V
R _{DS(ON)}	Drain - Source On-resistance	V _{CC} = 15V, I _D = 4A, T _J = 25 °C	-	240	-	mΩ
t _{ON}	Switching Times	V _{PN} = 400 V, V _{CC} = V _{BS} = 15 V, I _D = 8 A V _{IN} = 0/5 V, Inductive Load L = 3 mH (NOTE 3)	-	600	-	ns
t _{OFF}			-	300	-	ns
t _{tr}			-	30	-	ns
E _{ON}			-	600	-	μJ
E _{OFF}			-	120	-	μJ
R _{BSOA}	Reverse Bias Safe Operating Area	V _{PN} = 400 V, V _{CC} = V _{BS} = 15 V, I _D = I _{DP} , V _{DS} = BV _{DSS} , T = 150°C	Full Square			

NOTE 2: BV_{DSS} is the absolute maximum voltage rating between Drain and Source terminal of each MOSFET inside IPM. V_{PN} should be sufficiently less than this value considering the effect of the stray inductance so that V_{DS} should not exceed BV_{DSS} in any case.

NOTE 3: t_{ON} and t_{OFF} include the propagation delay time of the internal drive IC. Listed values are measured at the laboratory test condition, and they can be different according to the field applications due to the effect of different printed circuit boards and wirings. Please see Fig 3 for the switching time definition.

10.2 Control Part

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
I _{QCC}	Quiescent VCC Supply Current	V _{CC} = 15V V _{IN} = 5V Applied between VCC and COM	-	360	500	μA
I _{QB}	Quiescent VBS Supply Current	V _{DB} = 15V V _{IN} = 5V Applied between VB -VS	-	70	210	μA
UV _{CCD}	Low-Side Under-Voltage Protection	VCC Under-Voltage Protection Detection Level	7.4	8.2	9.0	V
UV _{CCR}		VCC Under-Voltage Protection Reset Level	8.0	8.9	9.8	V
UV _{BSD}	High-Side Under-Voltage Protection	VBS Under-Voltage Protection Detection Level	7.4	8.2	9.0	V
UV _{BSR}		VBS Under-Voltage Protection Reset Level	8.0	8.9	9.8	V
V _{TS}	HVIC Temperature Sensing Voltage Output	V _{CC} = 15 V, T _{HVIC} = 25°C (Fig:4)	0.6	0.75	0.90	V
V _{IH}	ON Threshold Voltage	Logic HIGH Level, Applied between VIN and COM	2.5	-	-	V
V _{IL}	OFF Threshold Voltage	Logic Low Level, Applied between VIN and COM	-	-	0.8	V
DT	Deadtime	T _c = 25°C, V _{CC} = 15V	400	540	680	ns

11. Function Description

11.1 Basic Function description

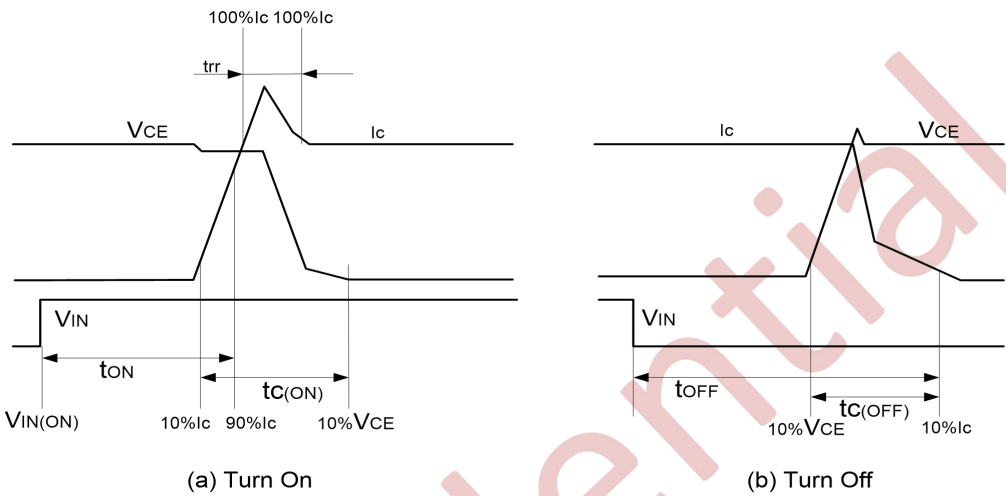


Fig. 3 Switching Time Definitions

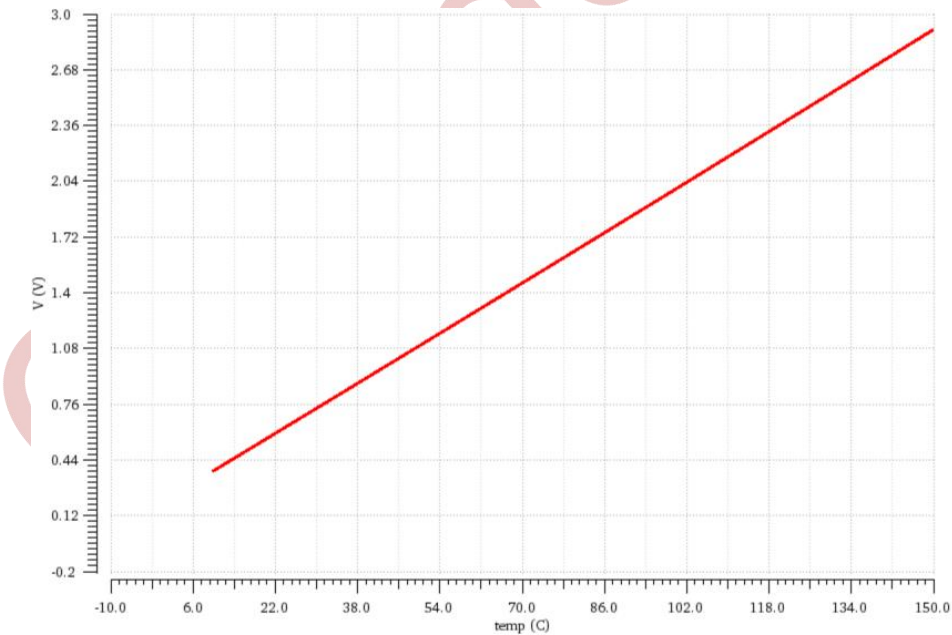


Fig. 4 Curves of HVIC Temperature detection—voltage curve

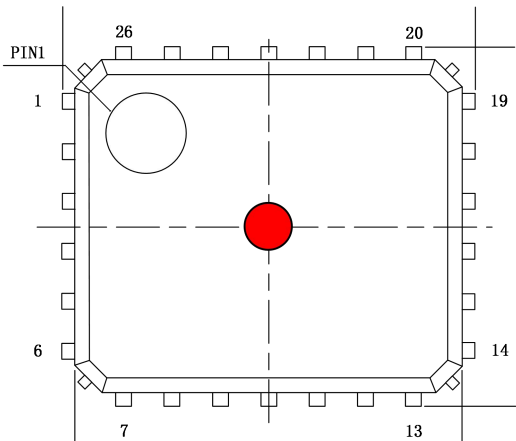


Fig. 5 Case Temperature Measurement

11.2 Time Charts of Protective Function

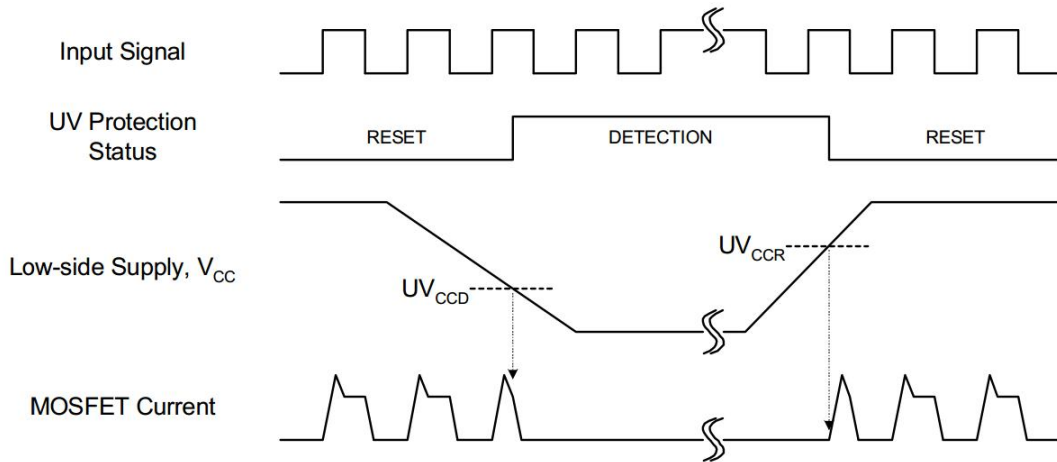


Fig. 6 Under voltage Protection (Low-side)

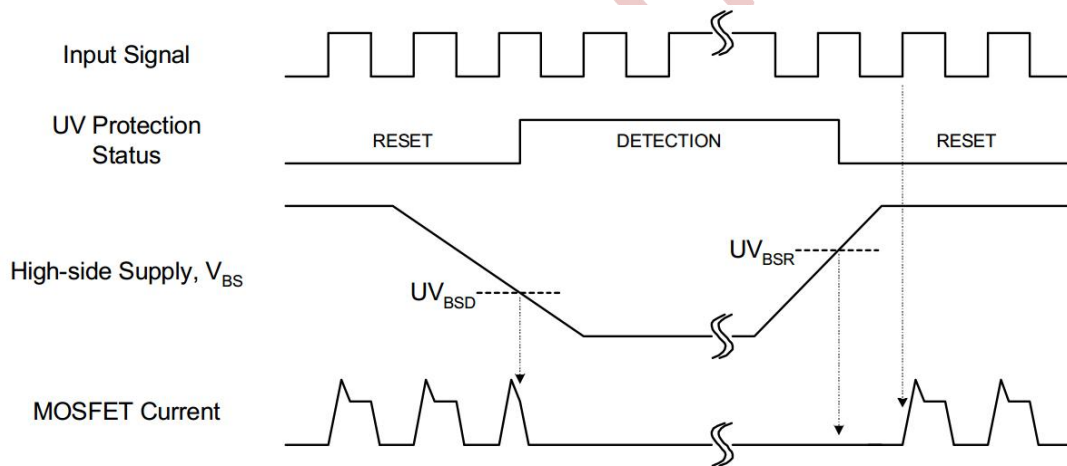


Fig. 7 Under voltage Protection (High-side)

12. NSH156PQ Typical Application Circuit

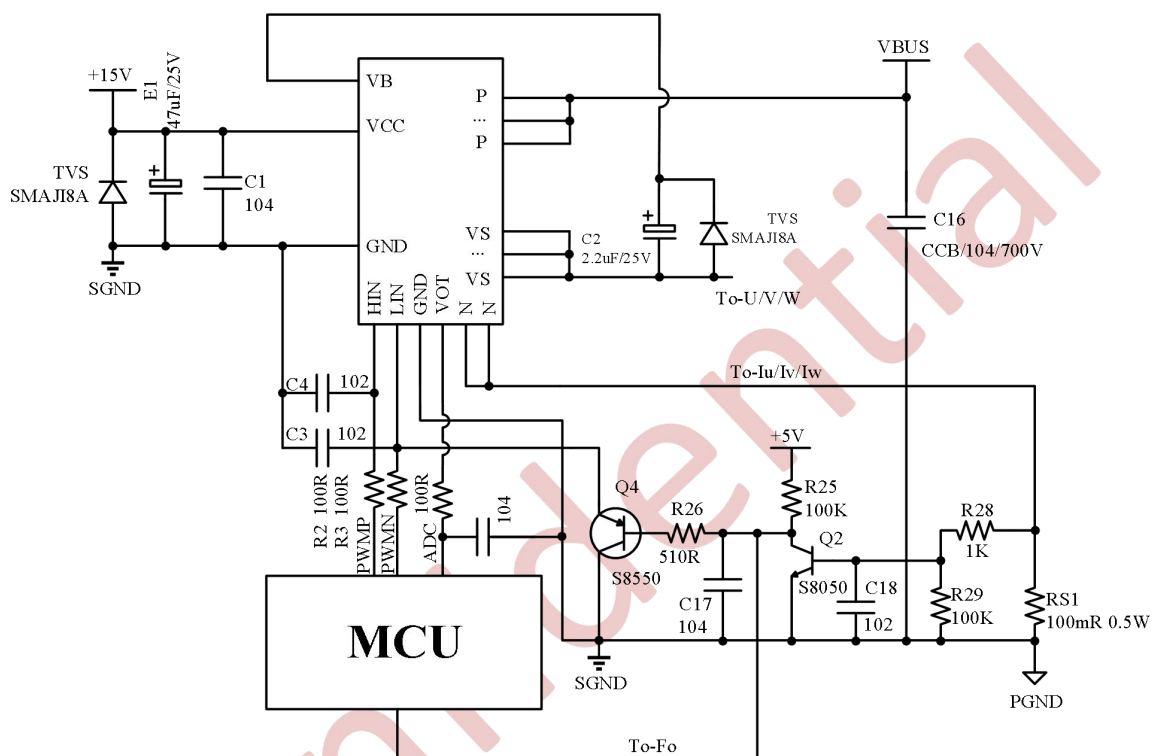


Fig.8 Typical Application Connection NSH156PQ

HIN	LIN	Output	Note
0	0	High Resistance	Both MOSFET Off
0	1	0	Low side MOSFET On
1	0	VDC	High side MOSFET On
1	1	High Resistance	Both MOSFET Off
open	open	High Resistance	Both MOSFET Off


- 1、使用时，模块要做好防潮处理，建议刷三防漆或者外部点绝缘胶
- 2、使用时，建议检测模块17脚温度信号，增加过温保护或者降功率，最高保护温度120℃（VOT=2.5V）。
- 3、使用时，尽量做好散热处理，可以参考加绝缘垫片或者陶瓷片，粘合到散热器上。

13. Detailed Package Outline Drawing

PQFN5x6 Package Dimensions

Size Symbol	MIN(mm)	TYP(mm)	MAX(mm)	Size Symbol	MIN(mm)	TYP(mm)	MAX(mm)
A	0.950	1.100	1.250	E3	1.325	1.475	1.625
b	0.150	0.250	0.380	E4	1.325	1.475	1.625
c	0.154	0.254	0.354	E5	0.850	1.000	1.150
D	5.958	6.108	6.258	E6	0.300	0.450	0.600
D1	6.250	6.400	6.550	e	0.650	0.750	0.850
D2	1.935	2.085	2.325	i	/	/	0.200
D3	1.400	1.550	1.700	k	1.000	/	/
D4	2.575	2.725	2.875	L	0.050	0.200	0.350
E	4.958	5.108	5.258	L1	0.450	0.600	0.750
E1	5.250	5.400	5.550	θ	9°	12°	15°
E2	1.515	1.665	1.815	ϕ	1.000	1.200	1.400

Package Outlines

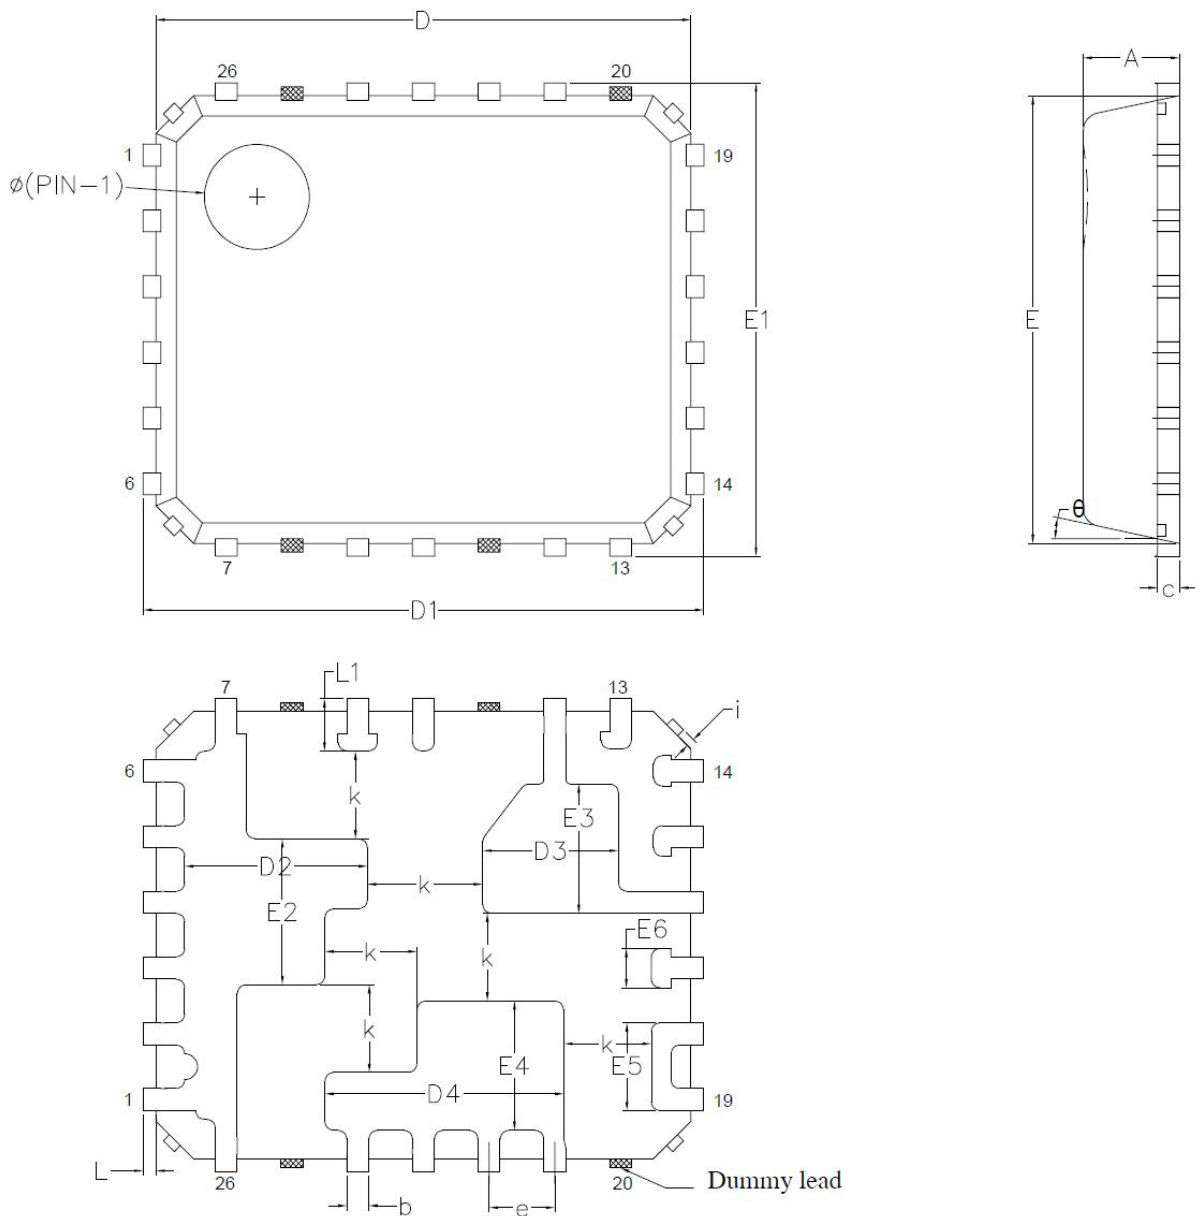

14. Disclaimer

- 本公司（国硅集成电路技术（无锡）有限公司）所提供的 NSH156PQ 产品及其相关数据表（以下简称“产品”）并未针对极高可靠性要求的应用进行设计或测试，如生命支持系统、飞机控制系统或其他一旦失效可能导致严重人身伤害和/或物质损失的应用。在使用本产品于此类应用之前，请务必咨询您附近的本公司代表。
- 本公司不对因超出产品规格（包括但不限于最大额定值、操作条件范围或其他参数）的瞬时或持续使用而导致的设备故障承担责任。用户应确保在使用本产品时遵守所有规定的规格和条件。
- 本数据表所述的产品性能、特性和功能均基于产品独立状态下的测试结果，并不构成产品在用户产品或设备中安装后的性能、特性和功能的保证。对于无法在产品独立状态下评估的症状和状态，用户应始终在其产品或设备中安装并测试产品以进行验证。
- 尽管本公司致力于提供高质量、高可靠性的产品，但所有半导体产品均存在一定的失效概率。这种概率性失效可能导致事故或事件，从而危及人身安全、引发火灾或烟雾，或造成其他财产损失。因此，在设计设备时，用户应采取安全措施，以防止此类事故或事件的发生。这些措施包括但不限于安全设计保护电路和防错电路、冗余设计以及结构设计。
- 如本数据表所述的任何产品或技术数据受当地出口管制法律法规的管辖，则在获得相关当局根据上述法律颁发的出口许可证之前，不得出口此类产品。
- 本数据表及其所包含的信息（包括电路图和电路参数）仅供示例之用，并不保证用于批量生产。本公司认为本数据表中的信息是准确可靠的，但对于其使用或任何侵犯第三方知识产权或其他权利的情况，本公司不作出任何明示或暗示的保证。
- 由于产品/技术改进等原因，本数据表及其中所述的信息可能会在不事先通知的情况下发生变更。在设计设备时，请参考您打算使用的国硅驱动产品的“交货规范”。
- 本声明基于 2023 年 5 月的信息编制，并可能在不通知的情况下进行更改。